

# PATENT ABSTRACTS OF JAPAN

(11)Publication number : 08-131401

(43)Date of publication of application : 28.05.1996

(51)Int.Cl.

**A61B 1/04**  
**G02B 23/24**  
**H04N 5/243**  
**H04N 7/18**

(21)Application number : 06-276158

(71)Applicant : ASAHI OPTICAL CO LTD

(22)Date of filing : 10.11.1994


(72)Inventor : SUGIMOTO HIDEO  
 OZAWA SATORU

## (54) ELECTRONIC ENDOSCOPE DEVICE

(57)Abstract:

**PURPOSE:** To provide an electronic endoscope device capable of reproducing an image with high quality even when dispersion between picture elements exists in the amplitude of a signal of saturation level outputted from each picture element of a solid-state image pickup element.

**CONSTITUTION:** This device is provided with saturation level amplitude correction circuits 21, 22 and 23 to correct the signal level of each picture element so as to arrange the amplitude of saturation level of the signal of each picture element at the minimum level required for the input dynamic range of an analog/digital conversion circuit 18 before an image pickup signal is inputted to the analog/digital conversion circuit 18.

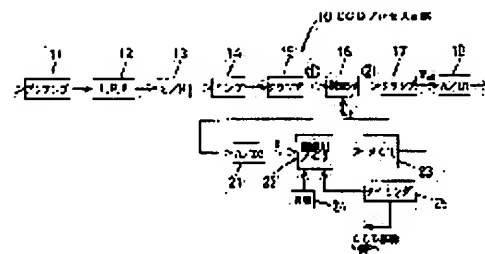

## LEGAL STATUS

[Date of request for examination]

01.10.2001

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2000 Japan Patent Office

**THIS PAGE BLANK (USPTO)**

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

## DETAILED DESCRIPTION

### [Detailed Description of the Invention]

[0001]

[Field of the Invention] This invention relates to the electronic endoscope equipment which prepared the solid state image pickup device which changes an observation picture image into an electrical signal at the nose of cam of the endoscope insertion section.

[0002]

[Description of the Prior Art] Drawing 10 shows the conventional electronic endoscope equipment, and after the analog signal outputted from the solid state image pickup device (not shown) arranged at the nose of cam of the endoscope insertion section is first amplified by suitable level by the preamplifier 51, a high frequency component etc. is cut in a low pass filter 52.

[0003] Subsequently, in a sample hold circuit 53, the output signal from each pixel of a solid state image pickup device is sampled, an image pck-up signal is extracted, and after amplifying the signal with the following amplifier 54 to the grade exceeding the input dynamic range of the analog-to-digital conversion circuit 56, waveform shaping which arranges the direct current level of one side by the clamping circuit 55 is performed.

[0004] And after changing the signal into a digital signal in the analog-to-digital conversion circuit 56, it is sent to the next image-processing circuit which is not illustrated, and the video signal for reproducing a color picture is generated.

[0005]

[Problem(s) to be Solved by the Invention] In the above circuits, there is dispersion in the amplitude of the saturation level of the signal outputted from each pixel of a solid state image pickup device between pixels.

[0006] That is, input signal \*\* and output signal \*\* to a sample hold circuit 53 in case the signal of saturation level is outputted in order from each pixel of a solid state image pickup device are illustrated, dispersion in an amplitude is amplified with amplifier 54, and drawing 11 has appeared as it is. VAD is the dynamic range of analog-to-digital conversion circuit 56 input, and Av is the gain of amplifier 54.

[0007] Thus, since dispersion between the pixels of the amplitude of the saturation level of the signal outputted from each pixel appears as it is in I/O of a sample hold circuit 53, when there is a pixel signal with which the input level to a sample hold circuit 53 is less than a dynamic range, as a sunspot, image display of the pixel will be carried out, and it will spoil a picture image quality remarkably.

[0008] However, in order to avoid such a phenomenon, when the amplification factor of amplifier 54 is gathered, a picture image noise will come to be conspicuous and, on the whole, a picture image quality will deteriorate shortly.

[0009] Then, even if this invention has dispersion in the amplitude of the signal of the saturation level outputted from each pixel of a solid state image pickup device between pixels, it aims at offering the electronic endoscope equipment which can reproduce a quality picture image.

[0010]

[Means for Solving the Problem] In order to attain the above-mentioned purpose, the electronic endoscope equipment of this invention Sample the analog signal outputted from the solid state image pickup device arranged at the nose of cam of the endoscope insertion section by the sample hold circuit, and an image pck-up signal is extracted. In the electronic endoscope equipment changed into the digital signal by the analog-to-digital conversion circuit after amplifying it Before making the above-mentioned image pck-up signal input into the above-mentioned analog-to-digital conversion circuit It is characterized by preparing the saturation level amplitude correction circuit for rectifying the signal level of each pixel so that the size of the amplitude of the saturation level of the signal of each pixel may be arranged with the level about [ required for the input dynamic range of the above-mentioned analog-to-digital conversion circuit ] the minimum.

[0011]

[Example] An example is explained with reference to a drawing. It is the schematic drawing showing the whole electronic endoscope equipment configuration, and an endoscope observation picture image is picturized, the signal outputted from the solid state image pickup device 2 is sent to the video processor 3 connected to the endoscope 1 by the solid state image pickup device 2 which was built in at the nose of cam of the insertion section of an endoscope 1 and which consists of a charge-coupled device (CCD), for example, and drawing 2 is inputted into CCD process circuit 10 in the video processor 3.

[0012] Drawing 1 shows CCD process circuit 10, and after the analog signal outputted from the solid state image pickup device 2 is first amplified by suitable level by the preamplifier 11, a high frequency component etc. is cut in a low pass filter 12.

[0013] Subsequently, in a sample hold circuit 13, the output signal from each pixel of a solid state image pickup device 2 is sampled, an image pck-up signal is extracted, and after amplifying the signal with the following amplifier 14 to the grade exceeding the input dynamic range of the main analog-to-digital conversion circuit 18, waveform shaping which arranges the direct current level of one side by the clamping circuit 15 is performed. So far, it is the same as that of the conventional circuit shown in drawing 10.

[0014] The signal in \*\* outputted from the clamping circuit 15 is a video signal which has dispersion in the amplitude of the saturation level of the signal outputted from each pixel, as shown in drawing 3.

[0015] While the high precision amplifier (henceforth a "multiplier") 16 which can control amplification degree by 8-bit digital data with high precision is connected to the analog signal inputted, multipoint connection of the analog-to-digital conversion circuit for correction 21 which outputs 8-bit digital data, for example is carried out to the outgoing end of a clamping circuit 15.

[0016] In case an endoscope is used, a very bright photographic subject is picturized by the solid state image pickup device 2, the output signal from all pixels is made into a saturation state, and the signal is made to input into the analog-to-digital conversion circuit for correction 21 as a setup first in this example.

[0017] And the following memory for picture images 22 is made to memorize the signal of the saturation level of all the pixels of a solid state image pickup device 2. Such housekeeping operation shall be performed only when the switch 24 arranged at the control panel of the video processor 3 is pushed.

[0018] In the usual observation status after the signal of the saturation level of all pixels was memorized by the memory for picture images 22, a drive and synchronization of a solid state image pickup device 2 are taken by the timing circuit 25, and the saturation level data corresponding to each pixel are outputted from the memory for picture images 22. Therefore, if it will be in the status, the function of the analog-to-digital conversion circuit for correction 21 will not be used any longer.

[0019] The data outputted from the memory for picture images 22 are inputted into the correction-factor store memory 23 in which the correction factor was stored. A correction factor is a coefficient for rectifying the data V1-V4 inputted from the memory for picture images 22

which is shown in drawing 4 so that all may be arranged with the dynamic range VAD of the input of the main analog-to-digital conversion circuit 18.

[0020] Thus, the correction factor corresponding to each pixel is outputted from the correction-factor store memory 23, it is inputted into a multiplier 16, and the amplification factor of a multiplier 16 is controlled for every pixel. Consequently, the signal amplitude of the saturation level of each pixel in \*\* of the drawing 1 outputted from a multiplier 16 is arranged with the dynamic range VAD of the input of the main analog-to-digital conversion circuit 18 in all pixels, as shown in drawing 5.

[0021] Subsequently, after performing waveform shaping which arranges the direct current level of one side by the clamping circuit 17, the signal outputted from a multiplier 16 is changed into a digital signal by the main analog-to-digital conversion circuit 18, and is outputted towards the image-processing circuit for generating a video signal.

[0022] the signal ( $V_{in}$ ) of 2.0Vpps which are the block diagrams for explaining the circuit fraction which performs above-mentioned signal correction still in detail, and are outputted from a clamping circuit 15 inputs drawing 6 into an attenuator (ATT) 27 — having — dynamic range VAD2 of the analog-to-digital conversion circuit for correction 21. It is inputted into the analog-to-digital conversion circuit for correction 21, after doubling 0.5 there, in order to store in maximum 2.0V. And after being changed into 8-bit digital data (D1) by the analog-to-digital conversion circuit for correction 21, the memory for picture images 22 once memorizes.

[0023] The data (D1) outputted from the memory for picture images 22 are inputted into the correction-factor store memory 23 in which the correction factor was stored, and the amplification factor  $A_v$  of a multiplier 16 is controlled by the 8-bit data (D2) outputted from there. In addition, the relation between D1 and D2 is set to  $D_2 = 64 \times 256 / D_1$  (formula 1), as a characteristic curve is shown in drawing 7.

[0024] Dynamic range VAD2 of the analog-to-digital conversion circuit [ here in drawing 6 ] for correction 27. When it is 2.0V, it is set to  $D_1 = 256$ , and  $V_{in}$  is set to  $D_1 = 256$  by 4.0V. Therefore, a formula called  $V_{in} / 4 = D_1 / 256$  (formula 2) is materialized. Moreover, as for the amplification factor  $A_v$  of a multiplier 16,  $D_2$  is set to  $A_v = D_2 / 256$  (formula 3) by a maximum of 256.

[0025] Since it is set to  $A_v = 1/V_{in}$ , the output from a multiplier 16 is always set to 1V from these formulas 1 - the formula 3. Then, it is made 2.0V which are VAD and is made to input into the main analog-to-digital conversion circuit 18 through a clamping circuit 17 by amplifying the signal twice with amplifier 28.

[0026] Thus, since a signal amplitude in case each pixel of a solid state image pickup device 2 is saturation level is arranged with the dynamic range VAD of main analog-to-digital conversion circuit 18 input in all pixels, a sunspot can reproduce on a screen the good picture image which moreover does not have a noise degradation.

[0027] The drawing 8 and the drawing 9 show the 2nd example of this invention, drawing 8 is the schematic drawing showing a whole configuration, and drawing 9 is a circuit block diagram. In the 1st above-mentioned example, whenever it exchanges the endoscope 1 to use, a switch 24 is operated, and the time which takes the amplitude data of the saturation level of the signal outputted from each pixel of a solid state image pickup device 2 is needed.

[0028] Then, the data which multiplied the correction property shown in a special, and its data and drawing 7 in the amplitude data of the saturation level of the signal outputted from each pixel of a solid state image pickup device 2 are read, it stores in the exclusive memory (ROM) 31, and the ROM31 is made to build in an endoscope 1 by the phase of manufacturing an endoscope 1, in this example.

[0029] And if an endoscope 1 is connected to the video processor 3, the data stored in ROM31 in an endoscope 1 are read, the data is transmitted to RAM (RAM) 32 in CCD process circuit 10, a drive and synchronization of a solid state image pickup device 2 will be taken, and the amplification factor of a multiplier 16 will be controlled by the timing circuit 33 per pixel like the 1st example.

[0030] The signal amplitude of the saturation level of each pixel can be arranged with the dynamic range VAD of main analog-to-digital conversion circuit 18 input in all pixels, without applying the time which takes the data of the saturation level of each pixel whenever it exchanges the endoscope 1 used by doing in this way.

[0031] [Effect of the Invention] Before making the image pick-up signal by the solid state image pickup device input into an analog-to-digital conversion circuit according to this invention. Since the size of the amplitude of the saturation level of the signal of each pixel is arranged with the level about [ required for the input dynamic range of an analog-to-digital conversion circuit ] the minimum. Even if dispersion is in the amplitude of the signal of the saturation level outputted from each pixel of a solid state image pickup device between pixels, a sunspot cannot come out to a screen but the picture image with the sufficient quality which moreover does not have the degradation by the noise can be reproduced.

---

[Translation done.]

(19) 日本国特許庁 (J P)

(12) 公開特許公報 (A)

(11) 特許出願公開番号

特開平8-131401

(43) 公開日 平成8年(1996)5月28日

(51) Int.Cl. <sup>6</sup>	識別記号	庁内整理番号	F I	技術表示箇所
A 6 1 B 1/04	3 7 2			
G 0 2 B 23/24		B		
H 0 4 N 5/243				
7/18		M		

審査請求 未請求 請求項の数 1 O L (全 5 頁)

(21) 出願番号 特願平6-276158  
(22) 出願日 平成6年(1994)11月10日


(71) 出願人 000000527  
旭光学工業株式会社  
東京都板橋区前野町2丁目36番9号  
(72) 発明者 杉本 秀夫  
東京都板橋区前野町2丁目36番9号 旭光  
学工業株式会社内  
(72) 発明者 小澤 了  
東京都板橋区前野町2丁目36番9号 旭光  
学工業株式会社内  
(74) 代理人 弁理士 三井 和彦

(54) 【発明の名称】 電子内視鏡装置

(57) 【要約】

【目的】 固体撮像素子の各画素から出力される飽和レベルの信号の振幅に画素間でばらつきがあっても、品質の良い画像を再生することのできる電子内視鏡装置を提供することを目的とする。

【構成】 撮像信号をアナログデジタル変換回路18に入力させる前に、各画素の信号の飽和レベルの振幅の大きさをアナログデジタル変換回路の18入力ダイナミックレンジに必要な最小限程度のレベルに揃えるように各画素の信号レベルを補正するための飽和レベル振幅補正回路21, 22, 23を設けた。

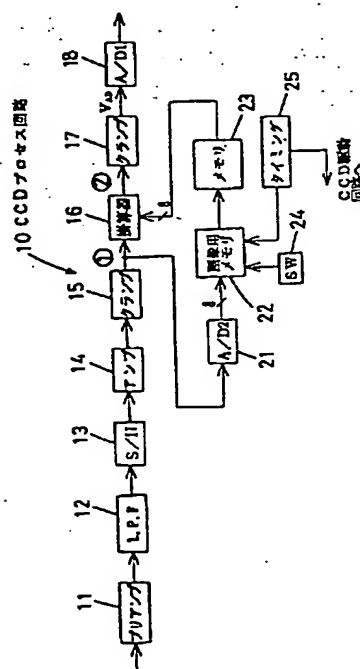

## 【特許請求の範囲】

【請求項1】内視鏡挿入部の先端に配置された固体撮像素子から出力されたアナログ信号をサンプルホールド回路でサンプリングして撮像信号を抽出し、それを増幅してからアナログデジタル変換回路でデジタル信号に変換するようにした電子内視鏡装置において、上記撮像信号を上記アナログデジタル変換回路に入力させる前に、各画素の信号の飽和レベルの振幅の大きさを上記アナログデジタル変換回路の入力ダイナミックレンジに必要な最小限程度のレベルに揃えるように各画素の信号レベルを補正するための飽和レベル振幅補正回路を設けたことを特徴とする電子内視鏡装置。

## 【発明の詳細な説明】

## 【0001】

【産業上の利用分野】この発明は、観察画像を電気信号に変換する固体撮像素子を内視鏡挿入部の先端に設けた電子内視鏡装置に関する。

## 【0002】

【従来の技術】図10は従来の電子内視鏡装置を示しており、内視鏡挿入部の先端に配置された固体撮像素子（図示せず）から出力されたアナログ信号が、まずプリアンプ51で適当なレベルに増幅された後、ローパスフィルタ52において高周波成分等がカットされる。

【0003】次いで、サンプルホールド回路53において固体撮像素子の各画素からの出力信号がサンプリングされて撮像信号が抽出され、その信号が、アナログデジタル変換回路56の入力ダイナミックレンジを越える程度まで次の増幅器54で増幅された後、クランプ回路55で片側の直流レベルを揃える波形整形が行われる。

【0004】そしてその信号が、アナログデジタル変換回路56においてデジタル信号に変換された後、図示されていない次の画像処理回路に送られて、カラー画像を再生するためのビデオ信号が生成される。

## 【0005】

【発明が解決しようとする課題】上述のような回路において、固体撮像素子の各画素から出力される信号の飽和レベルの振幅には画素間でばらつきがある。

【0006】即ち、図11は、固体撮像素子の各画素から飽和レベルの信号が順に出力される場合の、サンプルホールド回路53への入力信号①と出力信号②を例示しており、振幅のばらつきが増幅器54で増幅されてそのまま現れている。V<sub>AD</sub>は、アナログデジタル変換回路56の入力のダイナミックレンジ、A<sub>V</sub>は増幅器54の利得である。

【0007】このように、各画素から出力される信号の飽和レベルの振幅の画素間のばらつきがサンプルホールド回路53の入出力にそのまま現れるので、もしサンプルホールド回路53への入力レベルがダイナミックレンジを下回る画素信号があると、その画素は黒点として画像表示され、画像品質を著しく損なうことになる。

【0008】しかし、そのような現象を避けるために増幅器54の増幅率を上げると、画像ノイズが目立つようになって、今度は画像品質が全体的に低下してしまうことになる。

【0009】そこで本発明は、固体撮像素子の各画素から出力される飽和レベルの信号の振幅に画素間でばらつきがあっても、品質の良い画像を再生することのできる電子内視鏡装置を提供することを目的とする。

## 【0010】

【課題を解決するための手段】上記の目的を達成するため、本発明の電子内視鏡装置は、内視鏡挿入部の先端に配置された固体撮像素子から出力されたアナログ信号をサンプルホールド回路でサンプリングして撮像信号を抽出し、それを増幅してからアナログデジタル変換回路でデジタル信号に変換するようにした電子内視鏡装置において、上記撮像信号を上記アナログデジタル変換回路に入力させる前に、各画素の信号の飽和レベルの振幅の大きさを上記アナログデジタル変換回路の入力ダイナミックレンジに必要な最小限程度のレベルに揃えるように各画素の信号レベルを補正するための飽和レベル振幅補正回路を設けたことを特徴とする。

## 【0011】

【実施例】図面を参照して実施例を説明する。図2は電子内視鏡装置の全体構成を示す略図であり、内視鏡1の挿入部の先端に内蔵された例えば電荷結合素子（CCD）からなる固体撮像素子2によって内視鏡観察画像が撮像され、その固体撮像素子2から出力される信号が、内視鏡1に接続されたビデオプロセッサ3に送られて、ビデオプロセッサ3中のCCDプロセス回路10に入力される。

【0012】図1は、CCDプロセス回路10を示しており、固体撮像素子2から出力されたアナログ信号が、まずプリアンプ11で適当なレベルに増幅された後、ローパスフィルタ12において高周波成分等がカットされる。

【0013】次いで、サンプルホールド回路13において固体撮像素子2の各画素からの出力信号がサンプリングされて撮像信号が抽出され、その信号が、主アナログデジタル変換回路18の入力ダイナミックレンジを越える程度まで次の増幅器14で増幅された後、クランプ回路15で片側の直流レベルを揃える波形整形が行われる。ここまでは、図10に示した従来の回路と同じである。

【0014】そのクランプ回路15から出力される①における信号は、図3に示されるように、各画素から出力される信号の飽和レベルの振幅にばらつきのある映像信号である。

【0015】クランプ回路15の出力端には、入力されるアナログ信号に対して、8ビットのデジタルデータによって増幅度を高精度に制御することのできる高精度増

幅器（以下、「掛算器」という）16が接続されると共に、例えば8ビットのデジタルデータを出力する補正用アナログデジタル変換回路21が分岐接続されている。

【0016】この実施例においては、内視鏡を使用する際に先ず準備として、非常に明るい被写体を固体撮像素子2で撮像して全ての画素からの出力信号を飽和状態にし、その信号を補正用アナログデジタル変換回路21に入力させる。

【0017】そして、固体撮像素子2の全ての画素の飽和レベルの信号を、次の画像用メモリ22に記憶させる。そのような準備動作は、例えばビデオプロセッサ3の操作パネルに配置されたスイッチ24が押された時だけ行われるものとする。

【0018】全ての画素の飽和レベルの信号が画像用メモリ22に記憶された後の通常観察状態においては、タイミング回路25によって固体撮像素子2の駆動と同期をとって、各画素に対応した飽和レベルデータが画像用メモリ22から出力される。したがって、その状態になれば、補正用アナログデジタル変換回路21の機能はもはや使用されない。

【0019】画像用メモリ22から出力されたデータは、補正係数が格納された補正係数格納メモリ23に入力される。補正係数は、例えば図4に示されるような画像用メモリ22から入力されるデータV1～V4を、全て主アナログデジタル変換回路18の入力のダイナミックレンジV<sub>10</sub>に揃えるように補正するための係数である。

【0020】このようにして、各画素に対応する補正係数が補正係数格納メモリ23から出力されて掛算器16に入力され、掛算器16の増幅率が画素毎に制御される。その結果、掛算器16から出力される図1の②における各画素の飽和レベルの信号振幅は、図5に示されるように、全ての画素において主アナログデジタル変換回路18の入力のダイナミックレンジV<sub>10</sub>に揃えられる。

【0021】次いで、掛算器16から出力される信号は、クランプ回路17で片側の直流レベルを揃える波形整形が行われた後、主アナログデジタル変換回路18でデジタル信号に変換されて、ビデオ信号を生成するための画像処理回路に向けて出力される。

【0022】図6は、上述の信号補正を行う回路部分をさらに詳しく説明するためのブロック図であり、クランプ回路15から出力される2.0V<sub>pp</sub>の信号(V<sub>1n</sub>)が減衰器(ATT)27に入力され、補正用アナログデジタル変換回路21のダイナミックレンジV<sub>102</sub>の最大値2.0Vにおさめるために、そこで0.5倍されてから補正用アナログデジタル変換回路21に入力される。そして、補正用アナログデジタル変換回路21で8ビットのデジタルデータ(D1)に変換されてから、画像用メモリ22にいったん記憶される。

【0023】画像用メモリ22から出力されるデータ

(D1)は、補正係数が格納された補正係数格納メモリ23に入力され、そこから出力される8ビットのデータ(D2)によって、掛算器16の増幅率A<sub>v</sub>が制御される。なお、D1とD2との関係は、図7に特性曲線が示されるように、 $D2 = 64 \times 256 / D1$  (式1)としている。

【0024】ここでは、図6における補正用アナログデジタル変換回路27のダイナミックレンジV<sub>102</sub>が2.0Vの時にD1=256になり、V<sub>1n</sub>が4.0VでD1=256になる。したがって、 $V_{1n} / 4 = D1 / 256$  (式2)という式が成立する。また、掛算器16の増幅率A<sub>v</sub>は、D2が最大256で $A_v = D2 / 256$  (式3)になる。

【0025】これらの式1～式3より、 $A_v = 1 / V_{1n}$ となるから、掛算器16からの出力は常に1Vになる。そこで、その信号を増幅器28で2倍に増幅することによってV<sub>10</sub>である2.0Vにし、クランプ回路17を経て主アナログデジタル変換回路18に入力させる。

【0026】このようにして、固体撮像素子2の各画素が飽和レベルのときの信号振幅が、全ての画素において主アナログデジタル変換回路18入力のダイナミックレンジV<sub>10</sub>に揃えられるので、画面に黒点がでず、しかもノイズ劣化のない良質な画像を再生することができる。

【0027】図8及び図9は本発明の第2の実施例を示しており、図8は全体構成を示す略図であり、図9は回路ブロック図である。上述の第1の実施例では、使用する内視鏡1を取り替える度にスイッチ24を操作して、固体撮像素子2の各画素から出力される信号の飽和レベルの振幅データをとる手間が必要になる。

【0028】そこでこの実施例では、内視鏡1を製造する段階で、固体撮像素子2の各画素から出力される信号の飽和レベルの振幅データをとっておき、そのデータと図7に示される補正特性とを掛け合わせたデータを読み出し専用メモリ(ROM)31に格納して、そのROM31を内視鏡1に内蔵させておく。

【0029】そして、内視鏡1をビデオプロセッサ3に接続すると、内視鏡1内のROM31に格納されているデータが読み取られて、CCDプロセス回路10内のランダムアクセスメモリ(RAM)32にそのデータが転送され、タイミング回路33によって固体撮像素子2の駆動と同期をとって、掛算器16の増幅率が第1の実施例と同様に画素単位で制御される。

【0030】このようにすることにより、使用する内視鏡1を取り替える度に各画素の飽和レベルのデータを取る手間をかけることなく、各画素の飽和レベルの信号振幅を、全ての画素において主アナログデジタル変換回路18入力のダイナミックレンジV<sub>10</sub>に揃えることができる。

【0031】

【発明の効果】本発明によれば、固体撮像素子による撮

像信号をアナログデジタル変換回路に入力させる前に、各画素の信号の飽和レベルの振幅の大きさをアナログデジタル変換回路の入力ダイナミックレンジに必要な最小限度のレベルに揃えられるので、固体撮像素子の各画素から出力される飽和レベルの信号の振幅に画素間でばらつきがあっても、画面に黒点ができず、しかもノイズによる劣化のない品質の良い画像を再生することができる。

【図面の簡単な説明】

【図1】第1の実施例のCCDプロセス回路のブロック図である。

【図2】第1の実施例の全体構成を示す略図である。

【図3】第1の実施例の信号波形を示す線図である。

【図4】第1の実施例の信号波形を示す線図である。

【図5】第1の実施例の信号波形を示す線図である。

【図6】第1の実施例のCCDプロセス回路の部分詳細ブロック図である。

【図7】第1の実施例の補正特性線図である。

【図8】第2の実施例の全体構成を示す略図である。

【図9】第2の実施例の回路ブロック図である。

【図10】従来例のCCDプロセス回路のブロック図である。

【図11】従来例の信号波形を示す線図である。

【符号の説明】

2 固体撮像素子

18 主アナログデジタル変換回路


21 補正用アナログデジタル変換回路

22 画像用メモリ


23 補正係数格納メモリ

24 スイッチ


【図1】

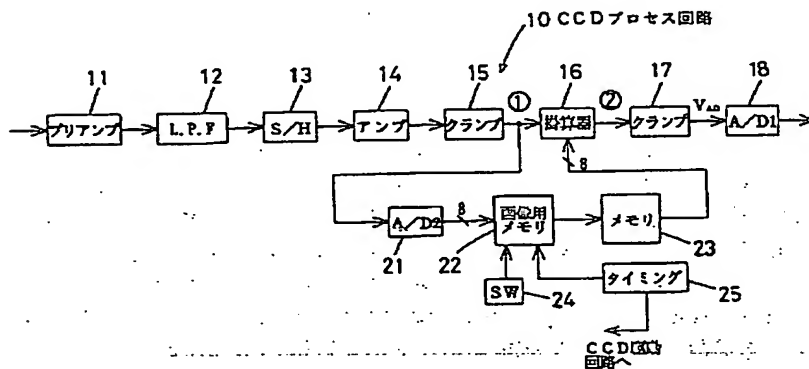


【図7】




【図2】

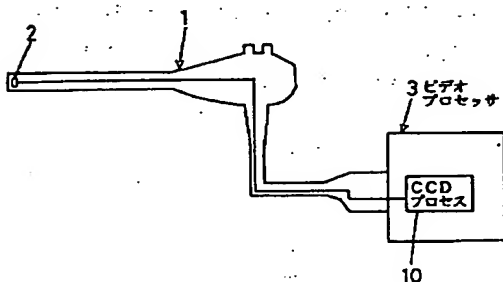


【図3】



【図4】

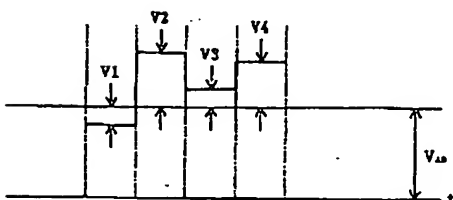


【図5】







【図6】

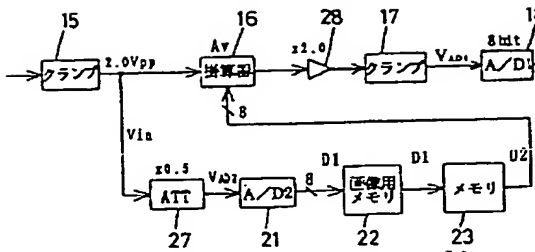


【図8】

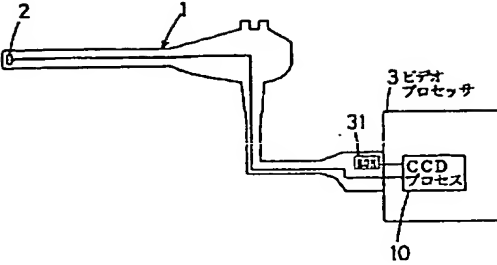


【図9】

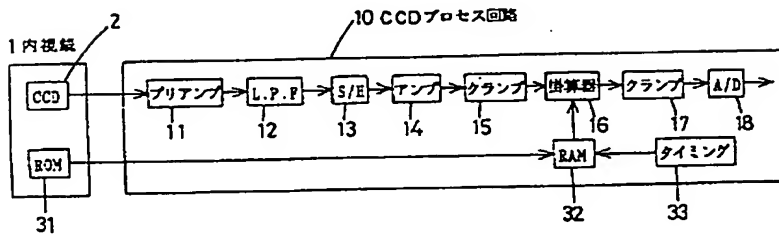

【図10】

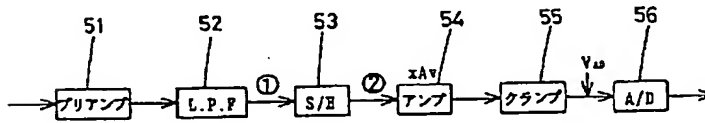

【図11】

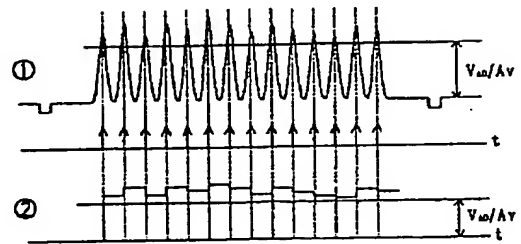

**THIS PAGE BLANK (USPTO)**